theLuxa S180 BK

Item no.: 1010506



Präsenzmelder & Bewegungsmelder Wandmontage außen

Description

- Passive infra-red motion detector
- For outdoor use
- Additional creep under protection
- Sensor head can be turned by \pm 90° horizontally and by 30° downwards
- Adjustable brightness switching value and switch-off delay
- Mixed light measurement suitable for the control of fluorescent, incandescent, halogen lamps and LEDs
- Zero-cross switching for relay-saving switching and high lamp loads
- Teach-in of current brightness value possible
- Pulse function
- Test function for checking detection area
- Installation on flush-mounted socket possible (60 mm)
- Single-handed plug-in installation
- Instant start-up possible via factory preset
- Controls are place protected
- Terminal for protective earth conductor





Technical data

	theLuxa S180 BK		
Operating voltage	230 V AC		
Frequency	50 Hz		
Stand-by consumption	~0.9 W		
Light measurement	Mixed light measurement		
Number of channels	1		
Colour	Black (similar RAL 9005)		
Switching output	Light		
Installation type	Wall installation		
Setting range brightness	5 – 1000 lx		

	theLuxa S180 BK	
Switching capacity	$ \begin{array}{c} 10 \text{ A at } 230 \text{ V AC, } \cos \varphi = 1, \text{ 6 A at} \\ 230 \text{ V AC, } \cos \varphi = 0.6, \text{ 3 AX at } 230 \text{ V} \\ \text{AC, } \cos \varphi = 0.3 \end{array} $	
Detection angle	180°	
Installation height	2 – 4 m	
Light switch-off delay	1 s-20 min	
Incandescent/halogen lamp load	2300 W	
Fluorescent lamp load (conventional) not corrected	2300 VA	

Subject to technical changes and misprints additional information at: www.theben.de/product/1010506 The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theLuxa S180 BK Item no.: 1010506




Technical data

	theLuxa S180 BK		
Fluorescent lamp load (conventional) parallel-corrected	1200 VA 120 µF		
Fluorescent lamp load (conventional) series-corrected	2300 VA		
Fluorescent lamp load (electronic ballast)	1000 W		
Energy saving lamps	250 W		
Inrush current	max. 300 A / 200 µs		
LED lamp < 2 W	50 W		
LED lamp 2-8 W	500 W		

	theLuxa S180 BK		
LED lamp > 8 W	500 W		
Lamps	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs		
Remote controlled	-		
Ambient temperature	-25°C 45°C		
Impact resistance	IK04		
Protection class	II		
Type of protection	IP 55		

Connection example

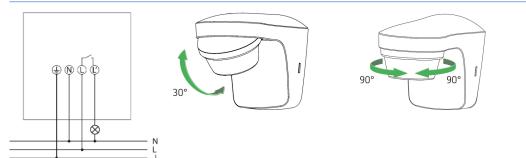

Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Diagonally (t)	Head on to (R)	
2 m	9 m	3 m	
2.5 m	12 m	5 m	
3 m	12 m	5 m	
3.5 m	12 m	5 m	
4 m	9 m	3 m	