



AW15



AW25


Features

- Fast installation in two steps with gas nailers.
- Compatibility with FORCE ONE+, FORCE ONE, FOX, and SPIT.
- Patented stick fit design. Allows firm holding on the nailer nose piece.
- Multiple applications. Allows firm fixing of profiles, plastic channel, metal sheets...
- The plastic piece can be removed to allow the installation with screws up to 4 mm diameter.

Certifications and approvals

HALOGEN
FREE

Main dimensions

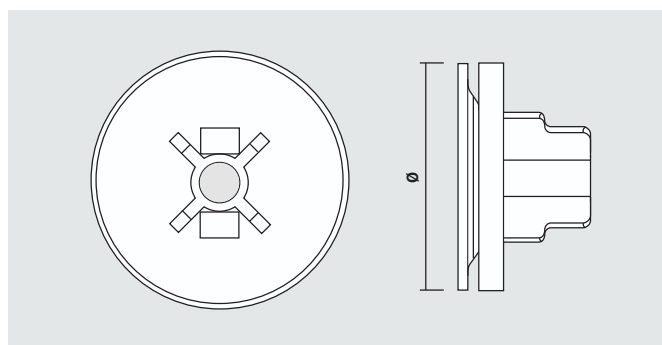

Reference	Ø [mm]
915AW	15
925AW	25

Base materials

- Steel
- Concrete
- Concrete block
- Solid brick

Installation procedure



Installation parameters

Material		Concrete	Concrete block	Steel
Minimum spacing distance	S_{min} (mm)	100	100	100
Minimum edge distance	C_{min} (mm)	75	100	25
Minimum thickness	h_{min} (mm)	100	35	3,5

Recommended loads

Material	Steel 5mm	Prefabricated concrete	Concrete 250 kg/cm ²	Concrete blocks
Selected nail ⁽¹⁾	TK13/1000	XH22/1000	TK25/1000	TK25/1000
Recommended load (kg) ⁽²⁾	20	35	30	25

⁽¹⁾ Recommended nail by CELO according to different material.

⁽²⁾ Safety factor included.