


# Kanlux



EAN: 5905339902504

Garden light fitting with replaceable light source  
Kanlux 46390 LEGINO GX53 EL5 B

IP  
65

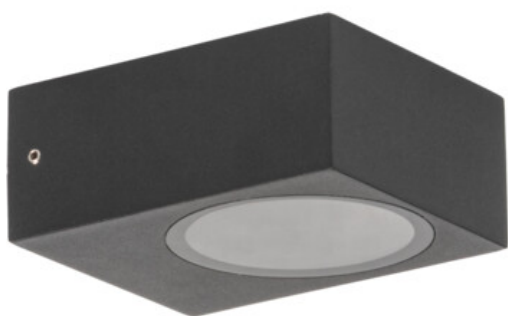

Date of issue: 01.06.2026, 10:56

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland [kanlux@kanlux.com](mailto:kanlux@kanlux.com)


EN

## PRODUCT PARAMETERS

|                       |                      |
|-----------------------|----------------------|
| Rated voltage [V]     | 220-240 AC           |
| Rated frequency [Hz]  | 50                   |
| Maximum power [W]     | max 11               |
| Cap (Light source)    | GX53                 |
| Light source          | LED                  |
| Light source included | no                   |
| Place of application  | Indoors and outdoors |
| IP class              | 65                   |

## DIMENSIONS AND MOUNTING

|                                       |                     |
|---------------------------------------|---------------------|
| Height [mm]                           | 50                  |
| Width [mm]                            | 100                 |
| Length [mm]                           | 120                 |
| Connection type                       | Bolt terminal block |
| Range of sections of wires used [mm²] | 1÷1,5               |



## MATERIAL AND CONSTRUCTION

|                                                               |                |
|---------------------------------------------------------------|----------------|
| Colour                                                        | black          |
| Material                                                      | aluminum alloy |
| Lampshade material                                            | glass          |
| Protective glass material                                     | glass          |
| Class of protection against electric shock                    | I              |
| Minimum distance from the illuminated object                  | 0,5m           |
| Ambient temperature range to which the product can be exposed | -20÷35         |

## LOGISTICS

|                                            |          |
|--------------------------------------------|----------|
| Unit of measurement                        | unit     |
| Packaging method                           | 20       |
| Number of units in the secondary packaging | 1        |
| Number of units in the packaging           | 20       |
| Net unit weight [g]                        | 638      |
| Grammage [g]                               | 698.2    |
| Gross unit weight [g]                      | 686      |
| Length of a unit pack [cm]                 | 11       |
| Width of a unit pack [cm]                  | 6        |
| Height of a unit pack [cm]                 | 13       |
| Weight of a cardboard box [kg]             | 13.964   |
| Width of a cardboard box [cm]              | 24       |
| Height of a cardboard box [cm]             | 28       |
| Length of a cardboard box [cm]             | 32       |
| Volume of a cardboard box [m³]             | 0.021504 |

Date of issue: 01.06.2026, 10:56

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com