


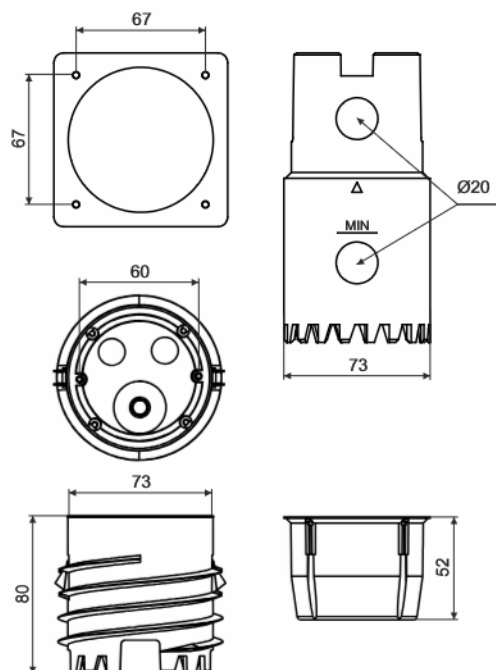

product description:

for installing devices in insulated facades from 80 mm insulation layer thickness
suitable for common types of insulation (polystyrene, mineral wool)
installation also in final insulated facades
junction boxes with sealed membrane inlets
included in the package: screw carrier, wiring box, manual drilling set, installation instructions, screws

The KEFZ 80/VDZ box set includes a reusable manual drill to make a hole for installing the box.

material: PP; PA (drill)

color: light grey RAL 7035

self-snuffing: yes, within 30 s

temperature resistance: -25 - +60 °C

flaming loop test: 850 °C

fire class of the underlying material: A1-F

weight: 202 g

meets the requirements: EN 60 670-1
ČSN EN IEC 60670-1 ed.2

storage: ČSN 64 0090

KEFZ 80/VDZ_KB – junction box with a drilling set, packed in cartons

recycling symbols



box



drill



cardboard











screws

 WARNING

risks associated with

using the products: incorrect electrical installation can cause a fire - we recommend the connection to be carried out exclusively by an authorized person
follow the manufacturer's installation instructions according to the installation instructions and videos
damage to the product - if the box is visibly damaged, stop using it
under normal and foreseeable conditions of use, the installed box does not pose any risks to consumers

Assembly instructions:

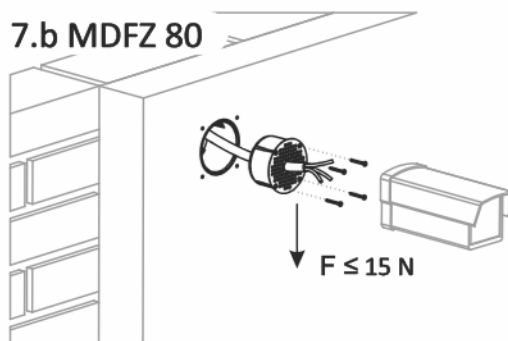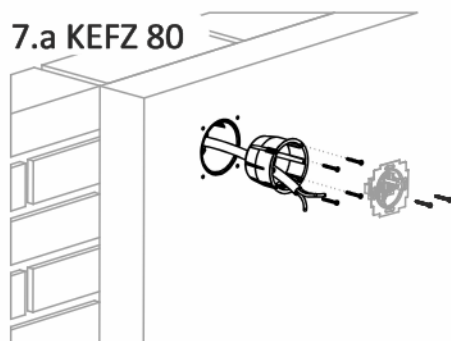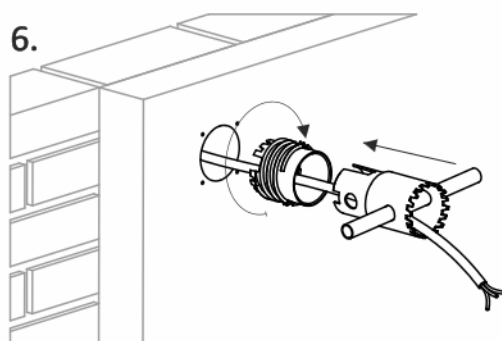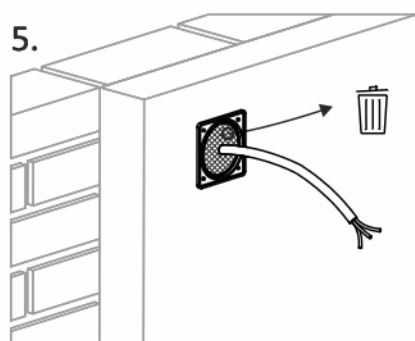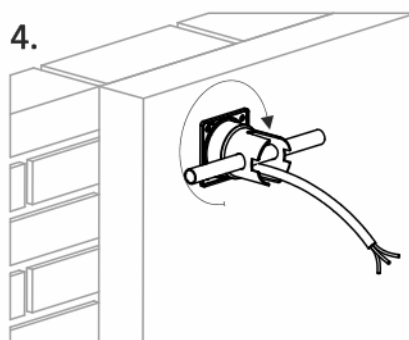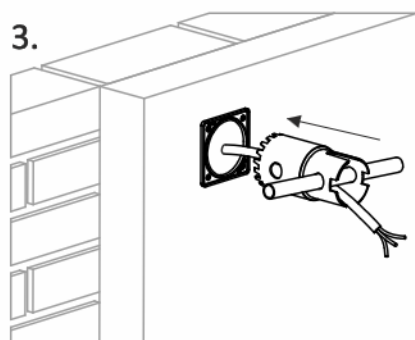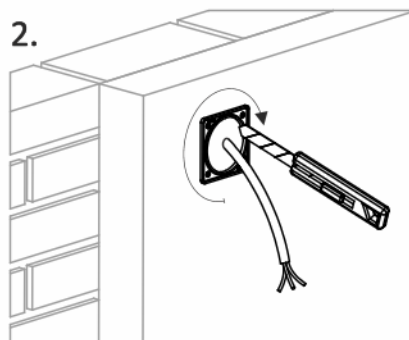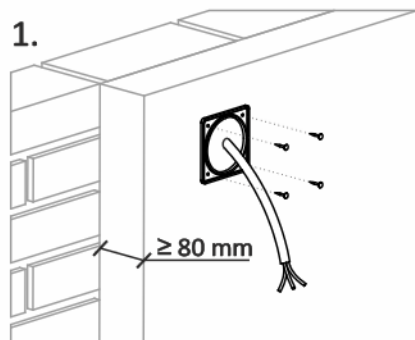

<https://youtu.be/g2pgZ7ttQ3g>