


LED line LITE

Code: 210004

EAN: 5905378210004

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)  
18/21/24W 2110lm round IP20 White LITE**

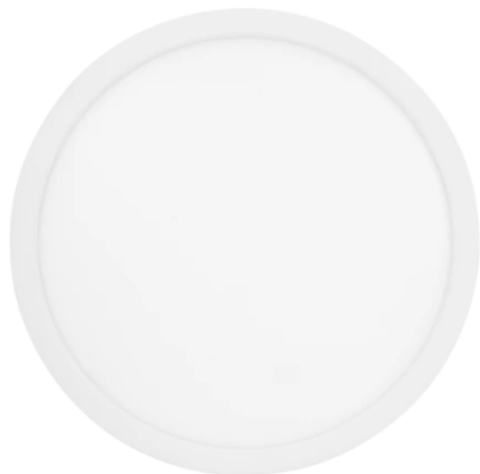

Downlight EASY FLEX 18-21-24W CCT is a modern LED line LITE lighting luminaire, characterized by a luminous flux performance of 2110 lumens. It allows to choose colour temperature in the range 3000 K, 4000 K and 5000 K, which provides flexibility in space arrangement. IP20 seal class guarantees protection against solid bodies larger than 12 mm and the IK05 protection level provides impact resistance.



**Technical data**

| Parameter                         | Value                                                                                          |
|-----------------------------------|------------------------------------------------------------------------------------------------|
| Energy efficiency class 2019/2015 | E                                                                                              |
| Warranty                          | 3                                                                                              |
| Power                             | <ul style="list-style-type: none"> <li>• 18 W</li> <li>• 21 W</li> <li>• 24 W</li> </ul>       |
| Voltage                           | <ul style="list-style-type: none"> <li>• 220-240 V AC</li> </ul>                               |
| Correlated colour temperature     | <ul style="list-style-type: none"> <li>• 3000 K</li> <li>• 4000 K</li> <li>• 5000 K</li> </ul> |
| Colour of the light               | CCT                                                                                            |
| Colour rendering index Ra         | 80                                                                                             |
| IP protection rating              | IP20                                                                                           |
| IK protection rating              | 05                                                                                             |
| IEC protection class              | II                                                                                             |
| Luminous efficacy                 | 88                                                                                             |
| Luminous flux                     | 2110                                                                                           |
| The lumen maintenance factor      | 96                                                                                             |
| Lifetime L70B50                   | 30 000 h                                                                                       |

| Parameter                                  | Value                                          |
|--------------------------------------------|------------------------------------------------|
| Survival factor                            | 0.9                                            |
| Colour consistency in McAdam ellipses      | ≤6                                             |
| Frequency of the supply voltage            | 50/60Hz                                        |
| Beam angle                                 | 120                                            |
| LED type                                   | SMD2835                                        |
| LED quantity                               | 168                                            |
| Number of on/off cycles                    | 15000                                          |
| Lamp's warm-up time to 60%                 | 1                                              |
| Ambient temperature suitable for operation | -20÷40                                         |
| Installation method                        | 3in1 surface mounted, flush mounted, suspended |
| Mounting hole diameter                     | 65-240                                         |
| Height                                     | 17                                             |
| Fixture's diameter                         | 300                                            |
| Colour                                     | White                                          |


LED line LITE

Code: 210004


EAN: 5905378210004

DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)  
18/21/24W 2110lm round IP20 White LITE

Technical drawing




Light distribution



Additional product photos




Logistics data




Single packaging

|        |         |
|--------|---------|
| Width  | 31 mm   |
| Height | 305 mm  |
| Length | 305 mm  |
| Weight | 0,56 kg |



Bulk packaging

|          |         |
|----------|---------|
| Quantity | 10      |
| Width    | 325 mm  |
| Height   | 325 mm  |
| Length   | 335 mm  |
| Weight   | 8,42 kg |



Europallet

|               |     |
|---------------|-----|
| Bulk quantity | 240 |
|---------------|-----|

---

LED line LITE

Code: 210004

EAN: 5905378210004

**DOWNLIGHT EASY FLEX 3CCT(3K/4K/5K)  
18/21/24W 2110lm round IP20 White LITE**

---

Example application