


Flexible waterproof LED strip

AKTOFlexLine


- Protected against environment influence IP67.
- Minor voltage drop – 2 oz PCB.
- High color rendering index CRI>80.
- Low color temperature tolerances (MacAdam 3).
- Wide range of colors (6500K, 4000K, 3000K, 2700K).
- Easy installation (e.g. double-sided adhesive tape).
- Long life time: >50 000 h.
- Extensive use of options (e.g. for architectural, accent lighting).
- 5-year warranty.
- Made in Europe.

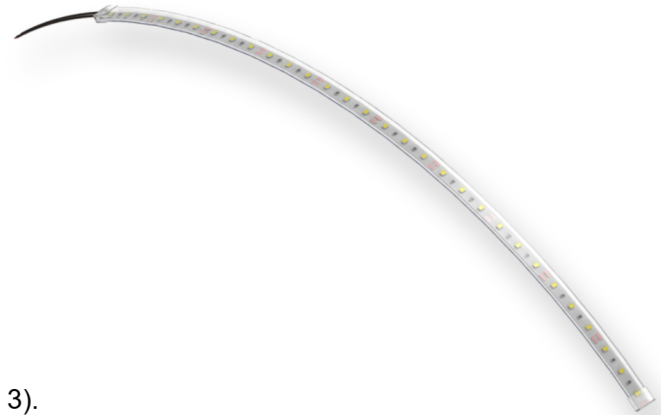

Product specifications:

Model	AFL-60U4824MHT-XW	AFL-60U14424MHT-XW
Dimensions, mm	1000x12x5.4	1000x12x5.4
Current, A	~0.2	~0.6
Voltage, V	24 VDC	24 VDC
Power, W/m	~4.8	~14.4
LED quantity, pcs	60	60
Luminous flux, Lm	529 (6500K); 529 (4000K); 496 (3000K); 485 (2700K)	1385 (6500K); 1385 (4000K); 1299 (3000K); 1270 (2700K)
Color rendering index, CRI	>80	>80
Light angle	120°	120°
Working temperature (Tc point)	-30° - +65°	-30° - +65°
PCB type	FLEX	FLEX
Connections	-	-
Package	5 meters	5 meters

Mechanical dimensions:

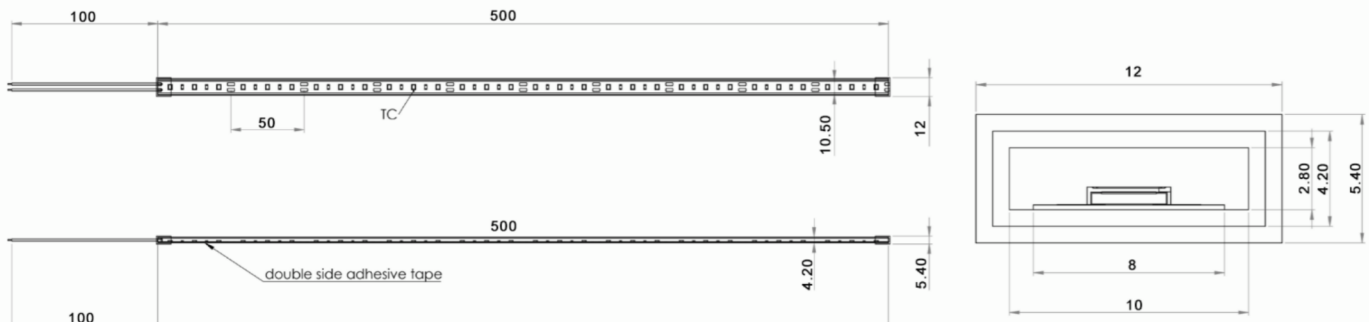

UAB AKTO

Mituvos str. 4,
LT-50130 Kaunas, Lithuania.

Mobile: +370 620 34211
E-mail: info@aktoled.com
www.aktoled.com

Registration Nr.: 302788513
VAT Nr.: LT100006898714

IBAN Number: LT667300010133518592
Bank: "Swedbank" AB
SWIFT Code: HABALT22