27370 APUS LED PIR WW

Staircase LED light fitting

5905339273703







Kanlux APUS means modern design combined with an attractive effect of lighting. It is a perfect idea to highlight stairs and corridors or to emphasize decor of rooms. The unique structure of the holders ensures even emission of light. The AC version is equipped with 230V power supply unit which fits into a box and the PIR version is equipped with a motion sensor. The sensor detects movement / turns lights on regardless of the ambient light intensity.

GENERAL DATA:

To be built into the wall: yes
Colour: stainless steel
Place of assembly: Recessed mount in the wall
Place of application: Indoors
Minimum distance from the illuminated object: 0,1m
Compatible with a dimmer: no
Wykrywanie ruchu: yes
Length [mm]: 75
Width [mm]: 23
Height [mm]: 75
Wire length [m]: 0.18
Required diameter of the assembly box [Ømm]: 60
Assembly-hole dimensions [mm]: 60
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 12 DC
Maximum power [W]: 0.8
Class of protection against electric shock: III
Diode type: LED SMD
Luminous flux [lm]: 13
Colour temperature: Warm white
Correlated colour temperature [K]: 3000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 50000
Number of on/off cycles: ≥20000
Luminous efficiency of the lamp [lm/W]: 16
Ambient temperature range to which the product can be exposed: 5÷25
Enclosure material: polished stainless steel, plastic
Sensor type: PIR
Connection type: Free cable ends
Sensor-operation time [second-minute]: 60--

Date of issue: 25.02.2022, 15:53
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN

27370 APUS LED PIR WW

Staircase LED light fitting



Lamp-heating time [s]: ≤1
Lamp-ignition time [s]: ≤0,5
sensor working angle [°]: H90/V40
IP class: 20
Sensor range[m]: max 5

LOGISTIC DATA:

Unit of measurement: unit
Packaging method: 100
Number of units in the secondary packaging: 1
Number of units in the packaging: 100
Net unit weight [g]: 84
Grammage [g]: 102.9
Length of a unit pack [cm]: 11
Width of a unit pack [cm]: 2.5
Height of a unit pack [cm]: 16.5
Weight of a cardboard box [kg]: 10.29
Width of a cardboard box [cm]: 24
Height of a cardboard box [cm]: 35.5
Length of a cardboard box [cm] : 63.5
Volume of a cardboard box [m³]: 0.054102

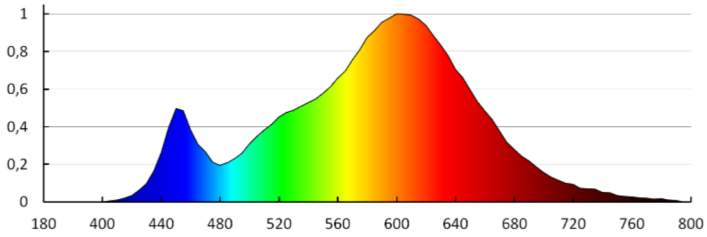

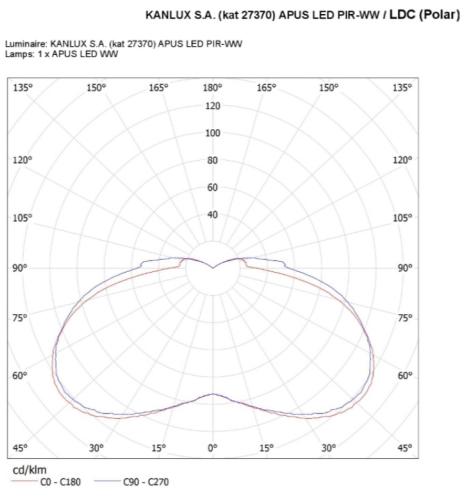

Date of issue: 25.02.2022, 15:53
We reserve the right to make technical changes. The data contained in this material are not legally binding.
Photometry: the results obtained from testing were from a specific sample.

EN