

Kanlux



EAN: 5905339394446


LED tape
Kanlux 39444 LCOB2L 28W/M24IP00-NW



2LINES



SUPER
HIGH
lumen

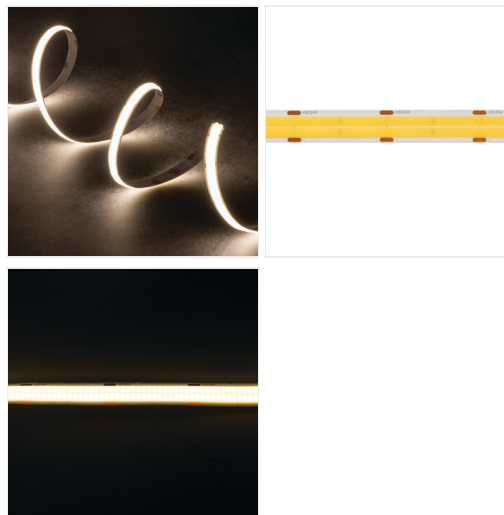

PRODUCT PARAMETERS

Rated voltage [V]

24 DC

Date of issue: 09.04.2026, 11:26

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

EN

PRODUCT PARAMETERS

Rated power [W]	1m = 28
Luminous flux [lm]	1m = 4090
Correlated colour temperature [K]	4000
Cap (Light source)	Free cable ends
Diode type	LED COB
Colour consistency in McAdam ellipses	6
Colour temperature	white
Colour rendering index	90
Rated lamp-service life [h]	30000
Number of on/off cycles	≥30000
Place of application	Indoors
IP class	00
Possibility of cutting LED strips into segments [cm]	5
Product category according to 2019/2020/EU	Light source (LS)
Mercury content	no
Mercury content in the lamp [mg]	0

DIMENSIONS AND MOUNTING

Height [mm]	5000
Width [mm]	12
Depth [mm]	2
Length [mm]	5000
Connection type	Free cable ends

MATERIAL AND CONSTRUCTION

Class of protection against electric shock	III
Minimum distance from the illuminated object	0,1m
Ambient temperature range to which the product can be exposed	5÷25

LOGISTICS

Unit of measurement	unit
Packaging method	25
Number of units in the secondary packaging	25
Number of units in the packaging	50
Net unit weight [g]	138
Grammage [g]	213.6
Gross unit weight [g]	186
Length of a unit pack [cm]	21
Width of a unit pack [cm]	1
Height of a unit pack [cm]	22.5
Weight of a cardboard box [kg]	10.68
Width of a cardboard box [cm]	30.5
Height of a cardboard box [cm]	44
Length of a cardboard box [cm]	46
Volume of a cardboard box [m³]	0.061732

LIGHT SOURCE PARAMETERS

On-mode power of the light source Pon [W]	0,5m = 14
Energy consumption in on-mode of the light source (kWh/1000h)	0,5m = 14
Energy efficiency class	D
Useful luminous flux of the light source Φuse [lm]	0,5m = 2045
Useful luminous flux of the light source Φuse [lm]	in sphere (360°)
Standby power (Psb)	0
Height of the light source [mm]	500
Width of the light source [mm]	12
Depth of the light source [mm]	2
Chromaticity coordinates (x)	0,38
Chromaticity coordinates (y)	0,38
Claim of equivalent power [W]	0,5m = 128
R9 colour rendering index value	62
Survival factor	0.9
The lumen maintenance factor	0.96
Colour-tuneable light source	no
High luminance light source	no
Anti-glare shield	no

ADDITIONAL INFORMATION

3 years Warranty under the terms of the warranty statement, available on our website


Date of issue: 09.04.2026, 11:26

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com

PHOTOMETRIC DATA

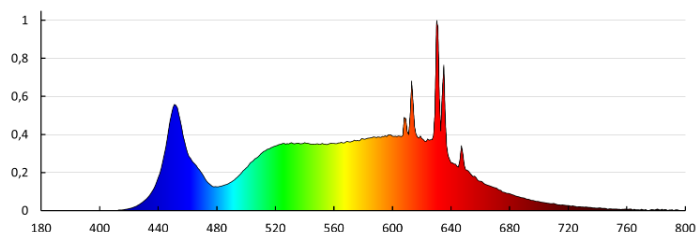


LIGHT SOURCE PARAMETERS

Dimmable

Ilość diod na metr

only with
specific
dimmers
960

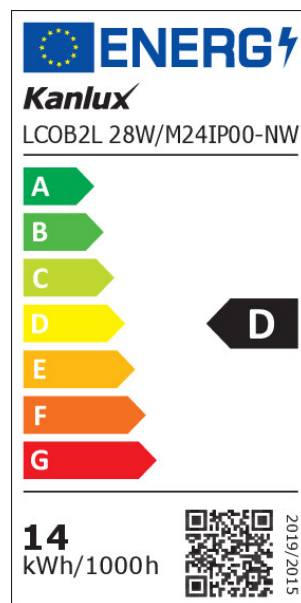

Date of issue: 09.04.2026, 11:26

We reserve the right to make technical changes. The data contained in this material are not legally binding.

Photometry: the results obtained from testing were from a specific sample.

Kanlux S.A. ul. Objazdowa 1-3, 41-922 Radzionków, Poland kanlux@kanlux.com