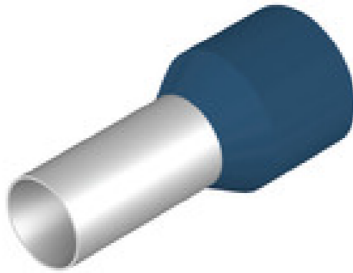


**H16,0/22D BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

- supplied loose in poly-bag
- Weidmüller colour code
- DIN colour code
- other colour code

**General ordering data**

|            |                                                |
|------------|------------------------------------------------|
| Version    | Wire-end ferrule, Standard, 15 mm, 12 mm, blue |
| Order No.  | <a href="#">9019260000</a>                     |
| Type       | H16,0/22D BL                                   |
| GTIN (EAN) | 4008190125806                                  |
| Qty.       | 100 pc(s).                                     |
| Packaging  | loose                                          |

## H16,0/22D BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

|            |        |
|------------|--------|
| Net weight | 0.67 g |
|------------|--------|

## Technical data

| Description of article | Wire end ferrule with plastic collar, blue | Version | Standard |
|------------------------|--------------------------------------------|---------|----------|
|------------------------|--------------------------------------------|---------|----------|

## Wire-end ferrules

|                                         |                    |                               |             |
|-----------------------------------------|--------------------|-------------------------------|-------------|
| Collar diameter (D2)                    | 8.8 mm             | Colour code                   | DIN         |
| Conductor cross-section                 | 16 mm <sup>2</sup> | Contact surface diameter (D1) | 5.8 mm      |
| Contact surface length (L2)             | 12 mm              | L1 in mm                      | 22 mm       |
| Metal sleeve thickness (S1)             | 0.2 mm             | Military designation          | T 20A 026 A |
| Plastic collar thickness (S2)           | 0.4 mm             | Stripping length              | 15 mm       |
| Wire connection cross section AWG, max. | AWG 6              |                               |             |

## Classifications

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000005    | ETIM 7.0    | EC000005    |
| ETIM 8.0    | EC000005    | ECLASS 9.0  | 27-40-02-01 |
| ECLASS 9.1  | 27-40-02-01 | ECLASS 10.0 | 27-40-02-01 |
| ECLASS 11.0 | 27-40-02-01 |             |             |

## Approvals

Approvals



ROHS

Conform

UL File Number Search

E499744

## Downloads

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| Engineering Data   | <a href="#">CAD data – STEP</a>                                                          |
| Engineering Data   | <a href="#">EPLAN, WSCAD, Zuken E3.S</a>                                                 |
| User Documentation | <a href="#">Technical information - EN</a><br><a href="#">Technical information - DE</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>                                                 |
| Brochures          |                                                                                          |

## H16,0/22D BL

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)

## Drawings

### Drawing

