LED line LITE

Code: 203822

EAN: 5905378203822

Street fixture FLAMINGO 4000K 50W 5000lm IP65 black LITE



FLAMINGO 50W road mounting in black is a modern and efficient lighting solution. With a power of 50W, it generates a light stream of 5,000 lumens at a colour temperature of 4000 K, which provides natural light. Made of solid aluminum, it is characterized by resistance to atmospheric conditions thanks to the IP65 class of tightness.

3 WARRANTY | IP 65 | IK 08 | PF 0,9 | 220-240V AC | ULOR 1%

Technical data

Parameter	Value
Energy efficiency class 2019/2015	E
Warranty	3
Power	• 50 W
Voltage	• 220-240 V AC
Correlated colour temperature	• 4000 K
Colour of the light	White
Colour rendering index Ra	80
IP protection rating	IP65
IK protection rating	08
IEC protection class	I
Luminous efficacy	100
Luminous flux	5000
The lumen maintenance factor	96
Lifetime L70B50	25 000 h
Survival factor	0.9

Parameter	Value
Colour consistency in McAdam ellipses	≤6
ULOR	<1%
Wire length	300 mm
Mounting type	mixed
Frequency of the supply voltage	50/60Hz
Beam angle	140 x 70
LED type	SMD LED
LED quantity	72
Power Factor	0,9
Lamp's warm-up time to 60%	1
Ambient temperature suitable for operation	-25÷50
For indoor use	Outside
Height	90 mm
Colour	Black
Material (cover)	Polycarbonate

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**


LED line LITE

Code: 203822


EAN: 5905378203822

Street fixture FLAMINGO 4000K 50W 5000lm IP65 black LITE

Technical drawing




Light distribution

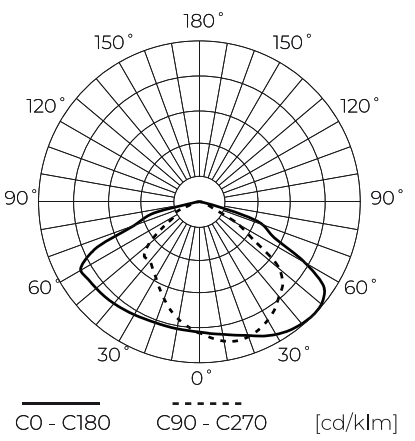

Additional product photos



Logistics data

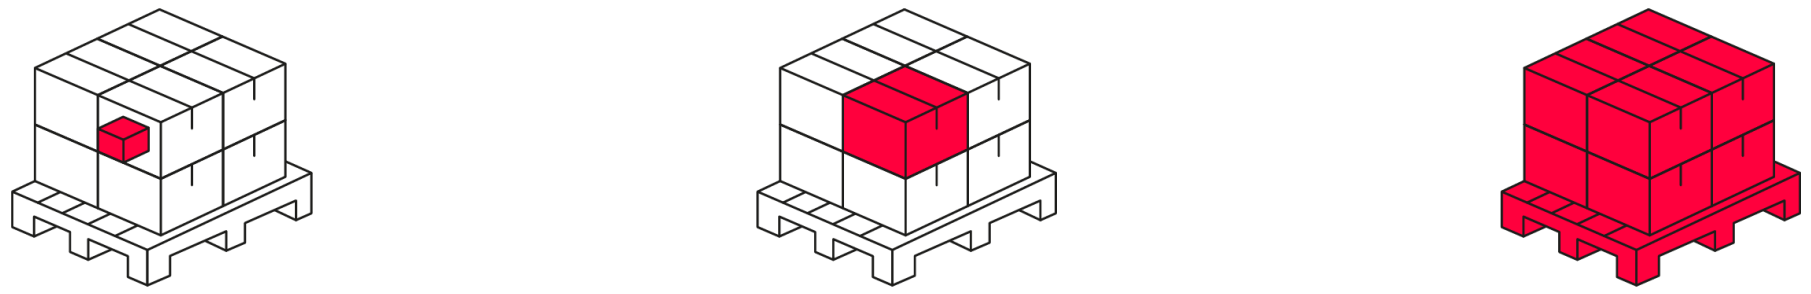

Single packaging

Quantity	1
Width	508 mm
Height	108 mm
Length	89 mm
Weight	0,95 kg

Bulk packaging

Quantity	20
Width	475 mm
Height	440 mm
Length	530 mm
Volume	0,110 m3
Weight	19 kg

Europallet

Quantity	160
Height	1,9 mm
Quantity in layer	
Number of layers	4
Bulk quantity	8
Weight	190 kg

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**

LED line LITE

Code: 203822

EAN: 5905378203822

Street fixture FLAMINGO 4000K 50W 5000lm IP65 black LITE

Example application

T: +48 29 764 77 00 export@ledline.pl **www.ledline.pl/en**